




Zodiac Lite STAND-ALONE FINGERPRINT READER FOR 90 USERS



FEATURES

- Stand-alone fingerprint reader for 90 users
- No PC or software required
- Programmed using battery operated, hand-held programmer
- Comes with separate Door Control Module to control lock or other device
- Optional door controller with audit capability

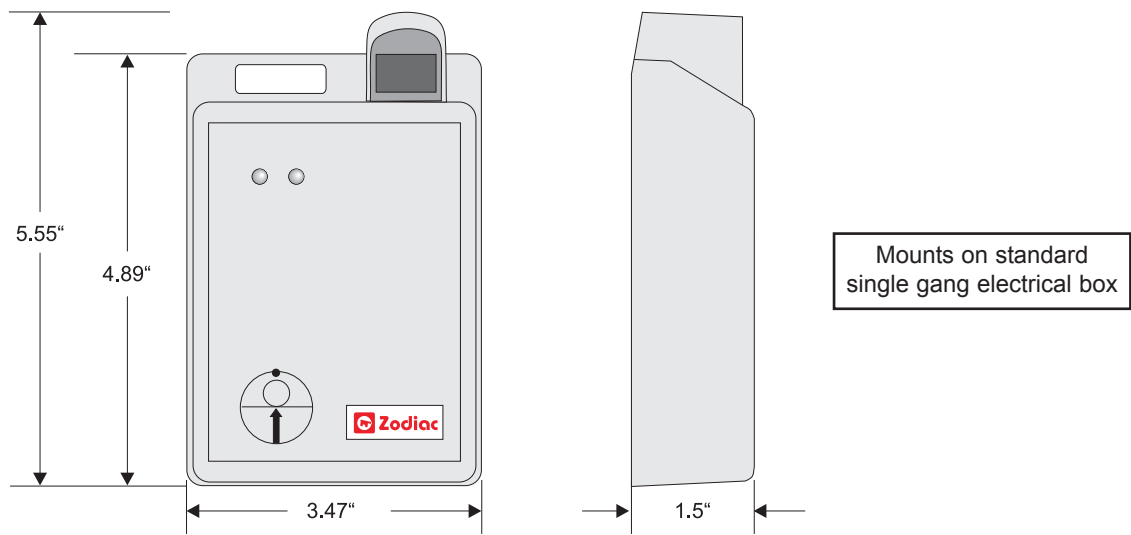

Introduction.....

The Zodiac Lite Fingerprint Reader is a cost-effective biometric solution for single door/device applications for up to 90 users. The Zodiac Lite Kit comes with a single reader, door control module, and hand-held programmer. No cards, PC, or software are required.

Programming is easy.....

All programming and enrollment functions are performed at the Zodiac Reader using the supplied Hand-Held Programmer. The programmer is equipped with two rotary switches numbered from 0 to 9, as well as ADD, DELETE, and ON/OFF buttons.

To place Zodiac into Program Mode, simply set both switches to "0" and apply the probe on the programmer to the programming port of the Zodiac reader. Then select one of the memory locations using the rotary switches on the programmer. Press the ADD button to enroll the user or DELETE button to remove the user's template from the reader.

Using Zodiac is easier ..

Because Zodiac Lite is performing 1:90 matching, no card or keypad entry is required. The Zodiac scanner continuously looks for fingers to authenticate. The user simply places their finger on the scanner for quick access to the door or device being controlled.

No prints ... No problem

It is a fact that a very small percentage of people cannot be enrolled due to injury or unreadable fingerprints. In this circumstance, a Zodiac Bypass Key can be programmed and issued. Users presenting a Bypass Key will not be required to scan their finger. Each system comes with 5 Bypass Keys.

Optional SmartLock door controller ...


For clients requiring historical audit data, Zodiac Lite can be used with the SmartLock Online door controller which stores up to 1000 time & date stamped transactions in memory.

Other applications ...

Zodiac Lite can be used for many other applications besides traditional door access control. The supplied Door Control Module can be used to enable or unlock other devices such as lockers, safes, and many other types of equipment. The applications are only limited by your imagination.

Specifications	Zodiac Lite Fingerprint Reader
LEDs:	2 x bi-colour, 1 externally controlled
Beeper:	Standard
Size:	3 1/4" (w) x 4 3/4" (h) x 1 1/2" (d)
Weight:	10 oz.
Mounting:	Standard single gang electrical box
Housing:	High impact polycarbonate (Lexan)
Operating Temp:	-15°C to 40°C
Environment:	Indoor/Outdoor with Zodiac enclosure
Power Supply:	12VDC, 200 mA
Sensor:	
Manufacturer:	SecuGen
Type:	Optical
Verification:	Authentication < 1 second
User Templates:	90
Programmer:	9V battery operated
Door Control Module:	Dry contact output, 30VDC @ 2A max. exit button input, dry contact N/O
Warranty:	One year

Typical Zodiac Lite Configuration:

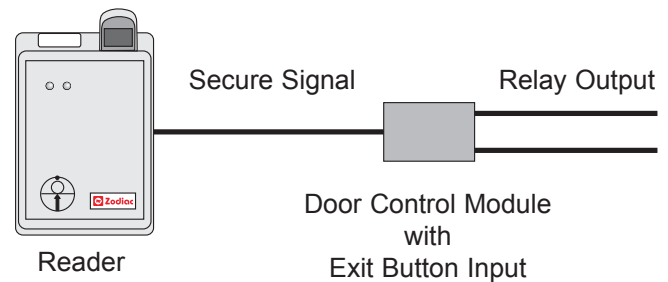

360 Carlingview Dr.
 Toronto, Ontario
 Canada, M9W 5X9
 Tel: (416) 798-0611
 Fax: (416) 798-1349
 www.kmthomas.com

Distributed by: