



Prox-Line TA-9121-S

Standard “Clamshell” Style Prox Badge Credit Card Sized with Beveled Edges Pre-Punched in Portrait Orientation Accepts “Photo-Flap” and Self-Adhesive Badge Overlays.



Prox-Line TA-9121-G

Graphics Quality Prox Card
ISO Compliant Thickness for Badging
Graphics Quality, Both Sides, Standard!
Portrait or Landscape Punch Capability No Diminished Read Range.
Available with magnetic stripe (GRMAG)



Prox-Line TA-9123

KeyTag Designed to Fit on Keyring/chain
Stylish, Tear Drop Design
Achieves 75 % Read Range of Cards
ABS Construction for High-Endurance

- **Technology:** Passive proximity @ 125 kHz.
- **Security:** The Prox-Line cards/tags can be programmed with up to 72,058 trillion unique codes.
- **Long Life:** No direct contact, no battery, capable of an infinite number of reads to assure years of maintenance free operation.
- **Custom Formats:** Field programmable Wiegand format up to 56 user definable bits insures security, compatibility and minimal lead times.
- **Warranty:** Prox-Line cards and tags are warranted for life against defects in material and workmanship (See detailed warranty policy)

Your source for a full spectrum of readers and tags for the access control industry.

Specifications

Prox-Line

Read Ranges:

TA-1134-E	TA-9121-S = 4 - 5.5" (10.2 - 14.0 cm)
	TA-9121-G = 4 - 5.5"
	TA-9123 = 3 - 4" (7.6 - 10.2 cm)
TA-1114	TA-9121-S = 6 - 8" (15.2 - 20.3cm)
	TA-9121-G = 6 - 8"
	TA-9123 = 5 - 6" (12.7 - 15.2cm)
TA-1134	TA-9121-S = 6 - 8" (15.2 - 20.3cm)
	TA-9121-G = 6 - 8"
	TA-9123 = 5 - 6" (12.7 - 15.2cm)
TA-1144	TA-9121-S = 18 - 24" (45.7 - 60.9cm)
	TA-9121-G = 18 - 24"
	TA-9123 = 14 - 19" (35.6 - 48.3cm)

Frequency: 125 kHz - Passive

Operating Temperatures:

-31 to 150 F (-35 to 65C)

Operating Humidity:

0-95% non-condensing

Weight:

TA-9121-S = .30 oz (8.5g)
 TA-9121-G = .23 oz (6.5g)
 TA-9123 = .25 oz (7.0g)

Color:


TA-9121-S = Off White
 TA-9121-G = White, Fine Matte Finish
 TA-9123 = Dark Gray

Warranty:


Lifetime warranty against defects in material and workmanship when installed according to TAC installation instructions. See complete warranty statement for further details.

Disclaimer:


Specifications subject to change without notice. TAC reserves the right to make changes to improve performance without impacting form, fit or function.

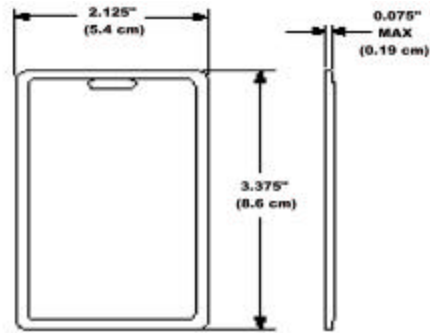

Prox-Line S Dimensions
 3.375 x 2.125 x .075 inches (8.57 x 5.4 x .19 cm)

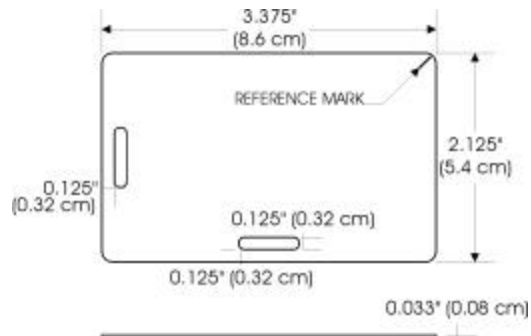

Prox-Line G Dimensions
 3.375 x 2.125 x .033 inches (8.57 x 5.4 x .08 cm)

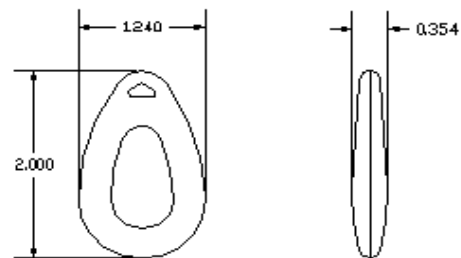

Prox-Line Dimensions
 2.0 x 1.24 x .35 inches (5.08 x 3.15 x .89 cm)



360 Carlingview Dr.
 Toronto, Ontario
 Canada, M9W 5X9
 Tel: (416) 798-0611
 Fax: (416) 798-1349
 www.kmthomas.com

Distributed by: